



LCS lowering system. A system that functions automatically and offers smooth and uniform lowering. It guarantees safe lowering in all circumstances, although an involuntary and/or abrupt and violent opening of the release valve is produced.



Safety overload valve.



Hydraulic stroke limitation.




Operation by the "dead man's" principle.



PF-350

Adjustable saddle with chains.
OPTIONAL

New release with dead man operation provides maximum lowering precision.

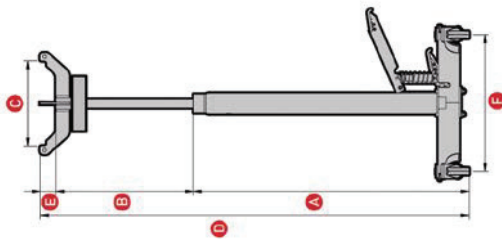

CAP. (kg)	300	750
A	1140	1110
B	850	820
C	315	315
D	1990	1930
E	60	60
F	610	720
Weight (kg)	22	30
REF.	TRS300	TRS750

Measures in mm.

TRS750

Rubber protections to prevent from any possible damage to the vehicle or to the crane legs.

They improve visibility to prevent accidental bumping.

TRS300

HIGH LIFT TRANSMISSION JACKS


For use in pits and underneath elevated vehicles. The lifting and lowering of the load using the foot pedals allow the hands to be free for other jobs. Easy manoeuvrable thanks to the swivel castors. The large base size provides high stability under load. With ergonomic handle.




BUREAU VERITAS
EN 1494



Design of cradle helps holding oil containers.

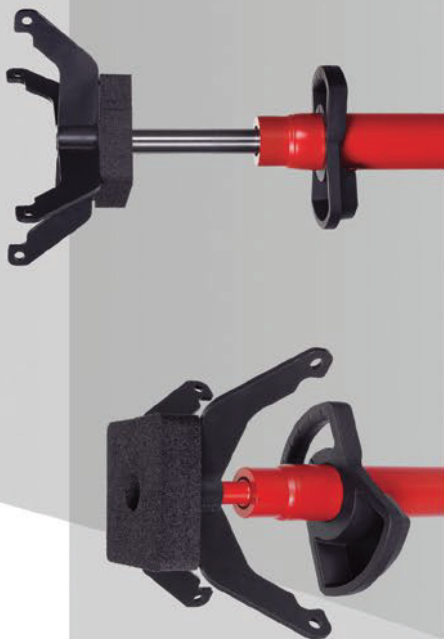

Handle with screws folding tray.

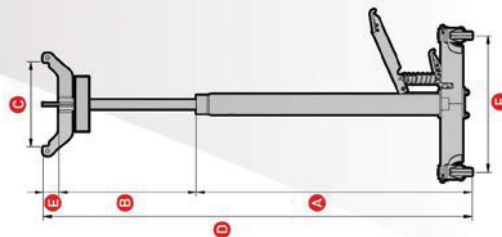

CAP. (kg)	1200	1200
A	1110	825
B	815	1000
C	315	315
D	1925	1825
E	60	60
F	720	720
Weight (kg)	32	33
REF.	TRS1200	TTRS1200

Measures in mm.

Unique high lift transmission jack with all functions operated by foot. Maximum stability, comfort and functionality.

TTRS1200



Block of protective foam to protect and hold vehicle parts. **Patented.**



TRS1200

