



HYDRAULIC HORIZONTAL BENDER





• PLC control with finger touch screen

Optional accessories

- Special tools for pipes and flat bars in required angles
- Special tools can be produced as customer's request
- NC control system

HB-40T

- Easy adjustable stroke length on the front side
- Feed speed regulation by valve control of el. current
- Massive and stable working table made of ground steel
- Manual slide adjustment at the machine front;
- Machine operating by foot pedal
- Adjustable pressure dial with gauge
- Includes 850 mm manual backgauge with standard working table
- Forward speed can up to 21.5 mm/s (40T) 20 mm/s (25T)
- Bending press speed: 2.8 mm/s (25T & 40T)

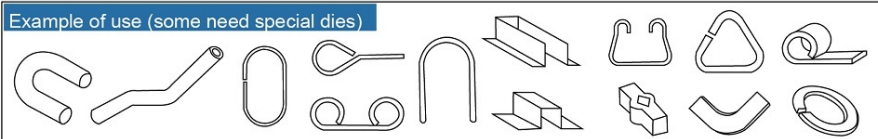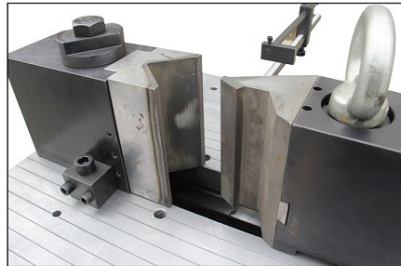

Item No.	375211	375212
Model	HB-25T	HB-40T
Bending Pressure	25 T	40 T
Table Size	1050x620 mm	1050x620 mm
Stroke Length	250 mm	250 mm
Bending Flat steel	120x12 mm	160x12 mm
Vee Bending Die	120x80 mm	160x80 mm
Main Motor	1.1 kW	1.5 kW
Packing Size	153x80x136 cm	155x80x136 cm
N.W./G.W.	620/660 kg	635/680 kg

Specifications subject to change without notice